




High speed precision spindles

SCHEDA TECNICA

TMPE8 SQUADRATICI SF

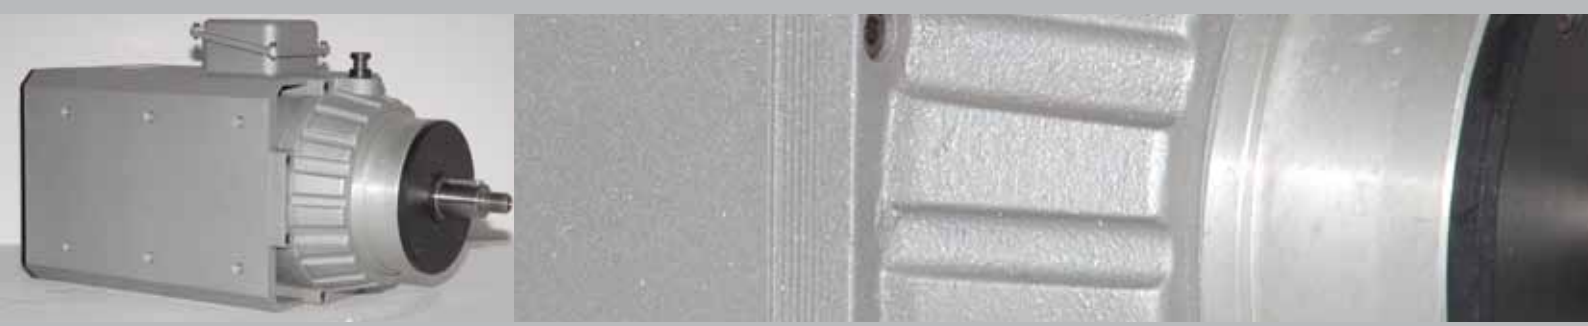

MODELLO	TENSIONE [Volt]	FREQUENZA [Hz]	GIRI	POT. RESA [Kw]	ASSORB. [Amp]	Cos j	PESO [Kg]
TMPE8 10/2	220/380 380Δ	50 100	3000 6000	8,2 11,2	29,3/16,9 25,5Δ	0,87	60
TMPE8 13/2	220/380 380Δ	50 100	3000 6000	11,2 16,4	37,3/21,5 32,6Δ	0,90	63

