


TYPE	VOLTAGE [Volt]	FREQUENCY [Hz]	RPM	DELIVER POWER [Kw]	ABSOR. [Amp]	Cos j	WEIGHT [Kg]
AF152 12/4 CU ISO 40 compressed air	350	100 - 333	3000 - 10000	6,0	14,2	0,85	59
ISO 40 liquid	350	100 - 333	3000 - 10000	7,5	17,8	0,85	59
AF152 12/4 CU ISO compressed air	350	150 - 333	4500 - 10000	8,0	19,6	0,82	59
ISO 40 liquid	350	150 - 333	4500 - 10000	9,0	22,1	0,82	59
AF152 12/4 CU ISO 40 compressed air	350	200 - 400	6000 - 12000	10,0	23,4	0,82	59
ISO 40 liquid	350	200 - 400	6000 - 12000	12,0	28,1	0,82	59
AF152 16/4 CU ISO 40 compressed air	350	100 - 333	3000 - 10000	7,5	17,8	0,84	75
ISO 40 liquid	350	100 - 333	3000 - 10000	10,0	23,9	0,84	75
AF152 16/4 CU ISO 40 compressed air	350	150 - 333	4500 - 10000	9,0	22,1	0,82	75
ISO 40 liquid	350	150 - 333	4500 - 10000	12,0	29,4	0,82	75
AF152 16/4 CU ISO 40 compressed air	350	200 - 400	6000 - 12000	12,0	28,1	0,80	75
ISO 40 liquid	350	200 - 400	6000 - 12000	16,0	38,3	0,80	75



NB. Attacchi aria/liquido e movimentazione pistone da 1/4 gas, pressurizzazione da 1/8 gas

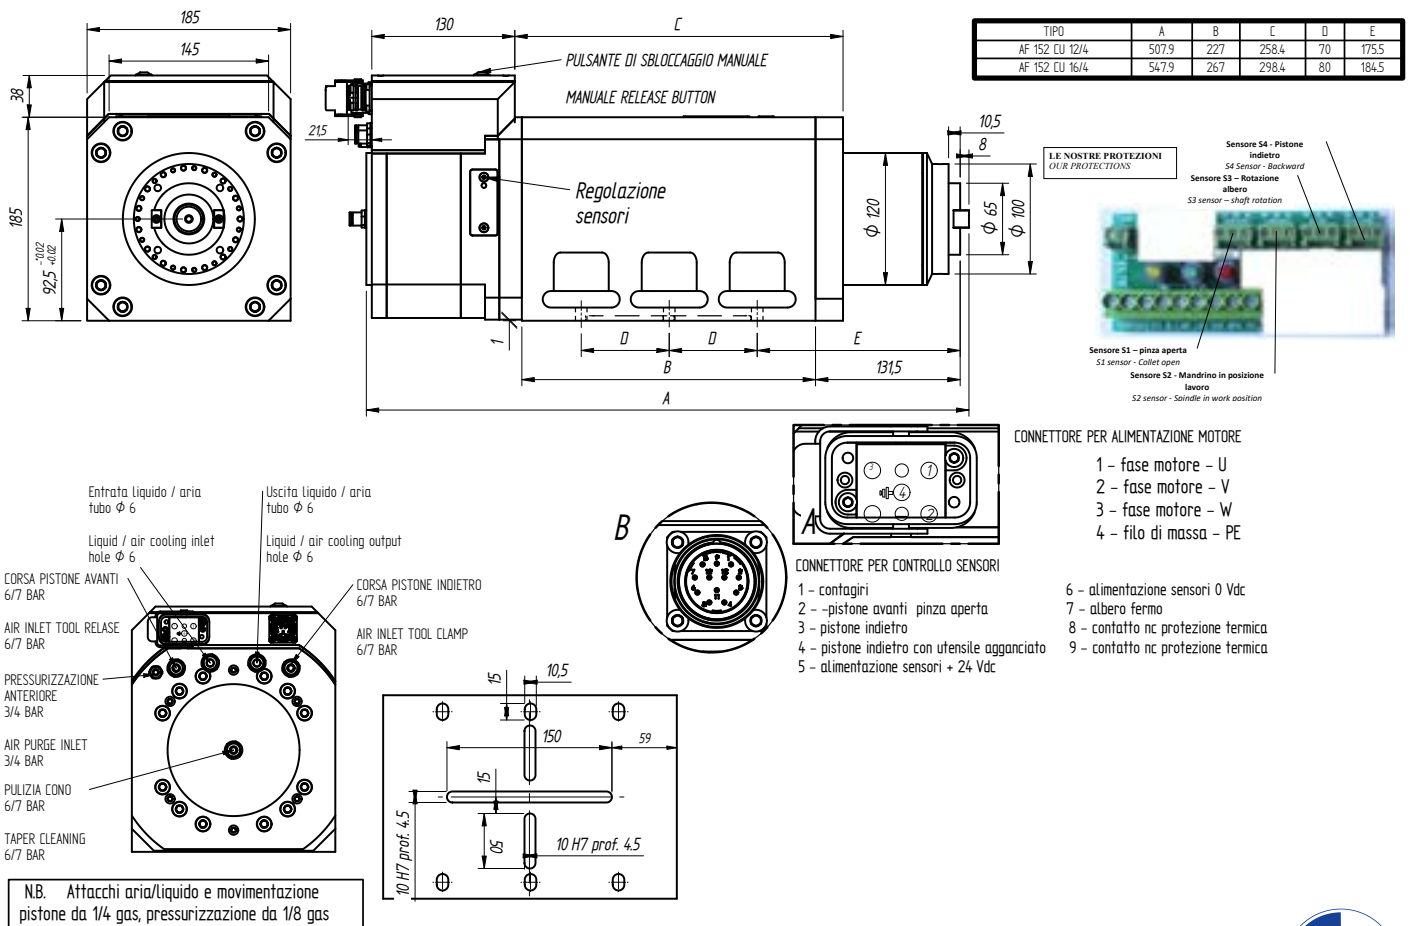