

膜片密封类型 04.111

概述

These instruments are designed to isolate the sensing element of pressure gauges from process fluids which may be corrosive, viscous, sediment and/or with high temperatures.


The 隔膜: seal cleaning is possible removing the upper cup from the process connection.



安德鲁信重工江苏有限公司

地址: 江苏省江阴市澄江东路3号 电话: 0510-86199978 86199979 传真: 0510-86199980
网址: www.andrewen.com www.andrewen.net 邮箱: info@andrewen

DIMENSIONS

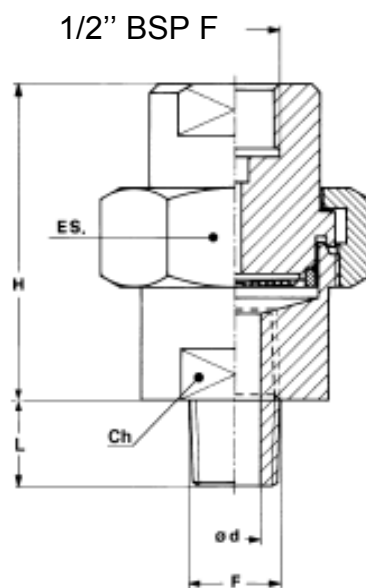

F (1)	Cod.	D	H	L	ES.	Ch
1/2" BSP M	41M	12	74	20	55	36

技术参数

范围：da 0 6 BAR a 0....250 BAR

工艺温度：- 45 +150 °C

工作压力：PN 250

精度：(add to the instrument accuracy) $\pm 0,5\%$ for direct mounting and ± 1 for mounting with capillary

仪表连接：AISI 316 st.st. thread 1/2 BSP F.

隔膜：: AISI 316 L st.st.

工艺连接：AISI 316 st.st. 1/2 thread BSP M.

Hexagonal nut : AISI 304 st.st.

Filling liquid : silicone oil



安德鲁信重工江苏有限公司

地址：江苏省江阴市澄江东路3号 电话：0510-86199978 86199979 传真：0510-86199980
 网址：www.andrewen.com www.andrewen.net 邮箱：info@andrewen