

膜片密封类型 04.400

概述

They are designed to isolate the sensing element of the gauges from process fluids which may be corrosive, viscous, sediment and/or with high temperatures.

Diaphragm faced position enables an accurate and deeper cleaning.


The flanged connections size UNI-DIN suit the applications in pharmaceutical, chemical, petrochemical, water treatment, paper and food industries.



安德鲁信重工江苏有限公司

地址: 江苏省江阴市澄江东路3号 电话: 0510-86199978 86199979 传真: 0510-86199980
网址: www.andrewen.com www.andrewen.net 邮箱: info@andrewen

DIMENSIONS

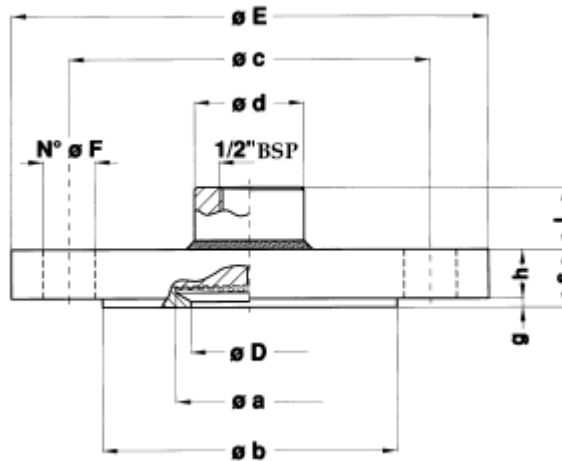

ENI-UNI STANDARDS (所有尺)

尺寸: 毫米	N-bar (1)	D	E	c	b	a	d	g	h	s	L	N(2)	F	ranges (3)
25	10÷40	25	115	85	68	50	38	2	17	19	24,5	4	14	1÷40
40	10÷40	40	150	110	88	50	38	3	16	19	24,5	4	18	1÷40
50	10÷40	50	165	125	102	50	38	3	17	20	23,5	4	18	1÷40

(1) The operating pressure must not exceed 1,5 times the PN flange at 20÷30°C and 1 time the PN flange at 350°C.

(2) N° holes.

(3) Scale ranges available in bar for instruments with DN starting from 100 mm.

技术参数

范围: from 0 1 BAR a 0....40 BAR depending on the flange rating

工艺温度: - 45 +150 °C

工作压力: PN 40

精度: : (add to instrument accuracy) ± 0,5% for direct mounting and ± 1 for mounting with capillary

仪表连接: AISI 316 st.st. thread 1/2 BSP F.

隔膜: : AISI 316 L st.st. welded

垫圈: PTFE (MAX 250 °C)

工艺连接 : AISI 316 st.st. flanged

Filling liquid : silicone oil

Dimensions : DN 25 ...50 PN PN 10...40 UNI-DIN step steal



安德鲁信重工江苏有限公司

地址: 江苏省江阴市澄江东路3号 电话: 0510-86199978 86199979 传真: 0510-86199980
 网址: www.andrewen.com www.andrewen.net 邮箱: info@andrewen