





DUAL SHAFT ELECTROSPINDLE

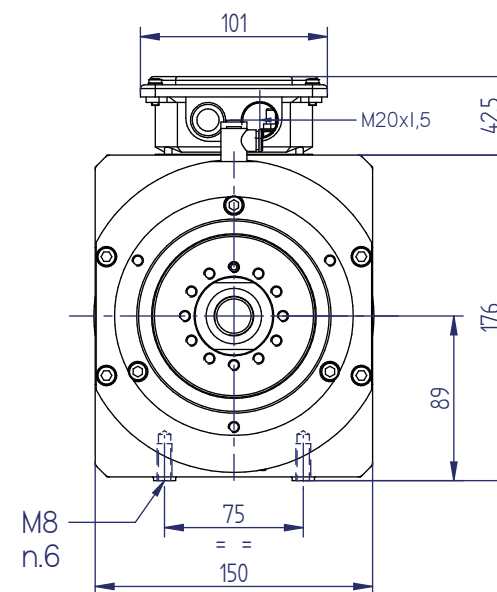

Raffreddamento aria compressa
Compressed air cooling

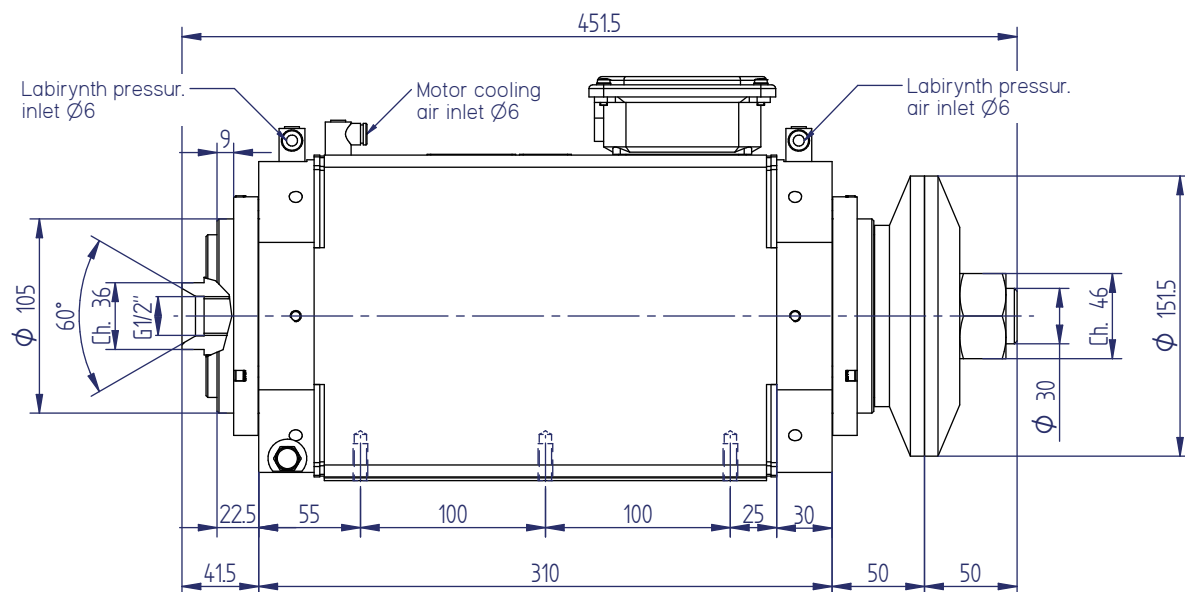

Classe di protezione IP55
IP55 degree of protection




10.000




Curva di coppia / potenza personalizzabile
Customized Torque / Power diagram

Attacco utensile personalizzabile
Customizable toolholder

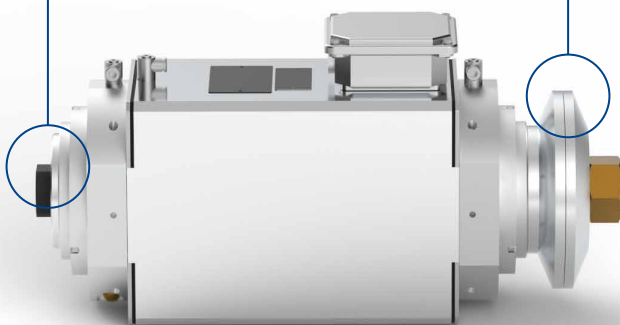

DUTY		S1	S6 - 60%
POWER	kW	3,7	4,4
TORQUE	Nm	6,0	7,1
VOLTAGE	V	400	400
RATED FREQUENCY	Hz	100	100
RATED SPEED	rpm	5905	5885
MAX. FREQUENCY	Hz	670	670
MAX. SPEED	rpm	10000	10000

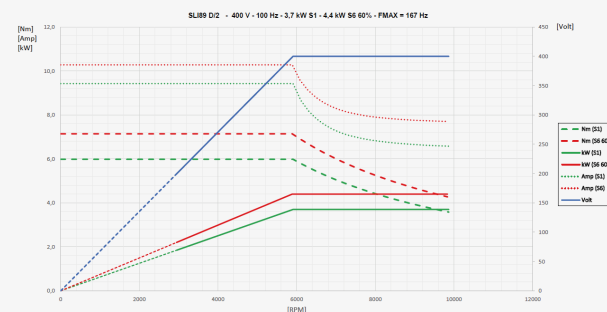

SLB 89

www.saccardo.it

M A D E I N I T A L Y

