

## 膜片密封类型 04.SAN

### 概述

Diaphragm seals are designed to isolate the sensing element of pressure gauges from process fluids which may be corrosive, viscous, sediment.

The elastic diaphragm welded to the upper body and leak proof tested, ensures the filling fluid separation from the process fluid.



安德鲁信重工江苏有限公司

地址: 江苏省江阴市澄江东路3号 电话: 0510-86199978 86199979 传真: 0510-86199980  
网址: [www.andrewen.com](http://www.andrewen.com) [www.andrewen.net](http://www.andrewen.net) 邮箱: [info@andrewen](mailto:info@andrewen)

# DIMENSIONS


## Range scale table

		FEMALE WITH UNION NUT		
工艺连接	DN	Ø 63	Ø 100	Ø 150
DIN 11851	25	0..4/0..40 BAR	0..6/0..40 BAR	
	32		0..6/0..40 BAR	0..6/0..40 BAR
	40		0..1,6/0..40 BAR	0..1,6/0..40 BAR
	50		0..1/0..40 BAR	0..2,5/0..40 BAR

### DIN11851

DN	H	.h	D	M
25	44	21	63	30
32	46	21	70	30
40	46	21	78	40
50	47	22	92	50

Female  
with union nut

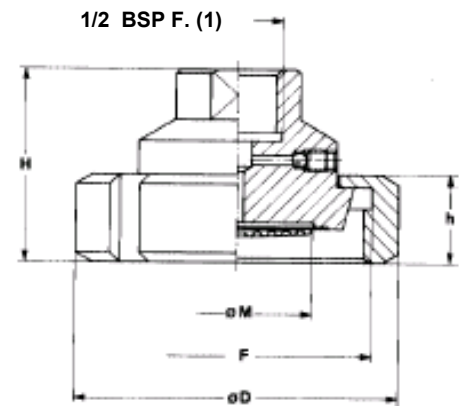

For DN 25 and DN 1"= 1/4 BSP

## 技术参数

范围: from 0 .... 1 BAR to 0....40 BAR

工艺温度: - 20 +120 °C

工作压力: PN 40 BAR

精度: (add to instrument accuracy) ± 0,5% for direct mounting

仪表连接: AISI 316 st.st. thread 1/2 BSP F.

隔膜: AISI 316L st.st., welded

工艺连接: AISI 316 st.st. according to standard DIN 11851

**Filling liquid** : oil for food industry



安德鲁信重工江苏有限公司

地址: 江苏省江阴市澄江东路3号 电话: 0510-86199978 86199979 传真: 0510-86199980

网址: www.andrewen.com

www.andrewen.net

邮箱: info@andrewen